

p993-KR



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 347 517 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
24.09.2003 Bulletin 2003/39

(51) Int Cl.7: **H01L 33/00**

(21) Application number: **01272546.1**

(86) International application number:
PCT/JP01/11628

(22) Date of filing: **28.12.2001**

(87) International publication number:
WO 02/054503 (11.07.2002 Gazette 2002/28)

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- **OTA, Akihito, c/o TOYODA GOSEI CO., LTD.**
Nishikasugai-gun, Aichi 452-8564 (JP)
- **TASCH, Stefan**
A-8380 Jennersdorf (AT)
- **PACHLER, Peter**
A-8010 Graz (AT)
- **ROTH, Gundula**
17498 Levenhagen (DE)
- **TEWS, Walter**
17489 Greifswald (DE)
- **KEMPFERT, Wolfgang**
36448 Bad Liebenstein (DE)
- **STARICK, Detlef**
36448 Bad Liebenstein (DE)

(30) Priority: **28.12.2000 AT 21542000**

- (71) Applicants:
- **Toyoda Gosei Co., Ltd.**
Nishikasugai-gun, Aichi 452-8564 (JP)
 - **Toridonic Optoelectronics GMBH**
8380 Jennersdorf (AT)
 - **Litec GBR**
17489 Greifswald (DE)
 - **Leuchstoffwerk Breitung GMBH**
98597 Breitung (DE)


(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Tiedtke-Bühling-Kinne & Partner GbR,
TBK-Patent,
Bavariaring 4
80336 München (DE)

- (72) Inventors:
- **OTA, Koichi, c/o TOYODA GOSEI CO., LTD.**
Nishikasugai-gun, Aichi 452-8564 (JP)
 - **HIRANO, Atsuo, c/o TOYODA GOSEI CO., LTD.**
Nishikasugai-gun, Aichi 452-8564 (JP)

(54) **LIGHT EMITTING DEVICE**

(57) The light emitting device has a light emitting diode which is made of a nitride semiconductor and a phosphor which absorbs a part of lights emitted from the light emitting diode and emits different lights with wavelengths other than those of the absorbed lights. The phosphor is made of alkaline earth metal silicate fluorescent material activated with europium.

Fig. 1

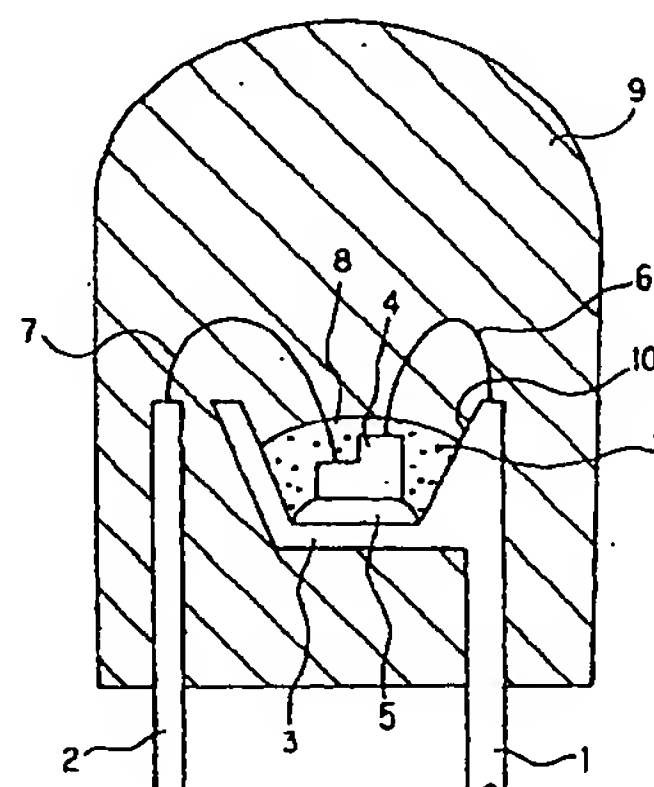

EP 1 347 517 A1

Description

FIELD OF THE INVENTION

5 [0001] The present invention relates to a light emitting device including a light emitting element, and more particularly to, a light emitting device including a light emitting element that emits light in a first spectrum region and a phosphor that is derived from the group of alkaline earth metal orthosilicate or at least contains the phosphor group of alkaline earth metal orthosilicate, and that absorbs part of light emitted from the light emitting element and emits light in another spectrum region.

BACKGROUND OF THE INVENTION

[0002] The light emitting device is, for example, an inorganic LED, an organic LED, a laser diode, an inorganic thick film electroluminescence sheet, or an inorganic thin film electroluminescence unit.

15 [0003] In particular, the LED is outstanding for the characteristics of a long life, the absence of necessity of a wide space, the strength against the impact, and further for the light emission in a narrow spectrum band.

[0004] The inherent light emission from an active semiconductor material of LED does not offer sufficiently a number of emission light colors, in particular, a number of emission light colors with a wide spectrum band. This is true of, in particular, the case that white color light emission is targeted.

20 [0005] From the state of the art, even an emission light color unavailable originally by semiconductors can be obtained by a color conversion technique.

[0006] The color conversion technique is essentially based on the following principle: that is, at least one phosphor is disposed on an LED die; the phosphor absorbs the light emission from the die; and then it emits photoluminescence light in another light emission color.

25 [0007] To compose the phosphor, basically, an organic material is available and an inorganic material is also available. The essential advantage of inorganic pigment is that it has a higher environment resistance than an organic based phosphor. In consideration of the color stability based on the long life of inorganic LED, the inorganic material is more advantageous.

30 [0008] In consideration of the processing easiness, it is apparently advantageous to use an inorganic fluorescent pigment instead of an organic fluorescent coat based phosphor that requires an excessively long growth period to obtain a necessary film thickness. The pigment is added into the matrix, and then placed on the LED die.

35 [0009] From the reason that the number of inorganic materials satisfying the above-mentioned demands is small, YAG group materials are, at present, used as the pigment for the color conversion in most cases. However, the YAG group materials have a disadvantage that they show a high efficiency only when the light emission maximum value is less than 560 nm. Because of this, when using a YAG pigment in combination with a blue diode (450 nm and 490 nm), only a white emission light color with a cold feeling can be realized. Especially, in the field of lighting, there is a higher demand concerning the color temperature and the color reproduction. This demand cannot be satisfied by white LED's available now.

40 [0010] The International publication No. WO 00/33389 discloses that $\text{Ba}_2\text{SiO}_4:\text{Eu}^{2+}$ can be used as the phosphor to get light close to white in using a blue LED. The emitted light of $\text{Ba}_2\text{SiO}_4:\text{Eu}^{2+}$ has a relatively short wavelength of 505 nm, and therefore, the light is remarkably in cold color.

45 [0011] S. H. M. Poort et al., "Optical properties of Eu^{2+} -activated" page 297 reports the properties of Ba_2SiO_4 and a phosphate such as Kb_2PO_4 and KSrPO_4 that are activated by Eu^{2+} . In this report, it is confirmed that the light emission of Ba_2SiO_4 is at 505 nm. Furthermore, it is reported that the light emission of the two phosphates are essentially at a further shorter wavelength (420 nm to 430 nm).


SUMMARY OF THE INVENTION

50 [0012] It is an object of the present invention is to provide a light emitting device that can offer different light colors or a high color reproducibility by the high photoluminescence effect through the remarkably good absorption of ultra-violet ray or blue ray emitted from a first light source by a phosphor. In this case, it is particularly advantageous that the position of the color in the CIE-deviation ellipse commonly used for a light source for ordinary lighting is in the extremely approximate color temperature range between about 2600 K and 7000 K.

55 [0013] According to the present invention, the light emitting device comprises a light emitting diode which is made of a nitride semiconductor and a phosphor which absorbs a part of lights emitted from the light emitting diode and emits different lights with wavelengths other than those of the absorbed lights. The phosphor is made of alkaline earth metal silicate fluorescent material activated with europium.

[0014] The phosphor may be an alkaline earth metal orthosilicate activated by a divalent europium represented by

the formula:




5



(wherein $0 < x < 1.6$, $0.005 < y < 0.5$, and $0 < a, b, c, d < 0.5$) and/or
an alkaline earth metal orthosilicate represented by

10



15

(wherein $0.01 < x < 1.6$, $0.005 < y < 0.5$, and $0 < a, b, c, d < 0.5$),
wherein at least one of the a, b, c , and d values is larger than 0.01 advantageously.

[0015] That is, it was found out unexpectedly that the wavelength of the irradiated light is prolonged in the case a strontium silicate or a mixture of a barium silicate and a strontium orthosilicate is used instead of a barium silicate. Substitution of silicon by germanium, and additionally existing P_2O_5 , Al_2O_3 and/or B_2O_3 influence on the light emission spectrum. As a result, the light emission spectrum can be adjusted optimally in each case of use.

20

[0016] The light emitting device has, advantageously, another phosphor from the group of an alkaline earth metal aluminate activated by divalent europium and/or manganese, and/or $\text{Y}(\text{V}, \text{P}, \text{Si})\text{O}_4$: Eu or, a further different phosphor for emitting a red light from the group of an alkaline earth metal-magnesium-disilicate: Eu^{2+} , Mn^{2+} represented by the formula:

25



30

(wherein $0.005 < x < 0.5$, $0.005 < y < 0.5$, and Me denotes Ba and/or Sr and/or Ca).

[0017] Furthermore, it was found out that including a small amount of monovalent ion, in particular, a halide into a phosphor matrix is advantageous to enhance the crystallization degree and the irradiation ratio.

[0018] It is advantageous that the first spectrum region is 300 to 500 nm. In this wavelength region, the phosphor of the present invention can be well excited.

35

[0019] Moreover, it is advantageous that the second spectrum region is 430 nm to 650 nm. In this case, a relatively pure white color can be further obtained.

[0020] The light emitting device advantageously emits white light with an Ra value > 72.

BRIEF DESCRIPTION OF DRAWINGS

40

[0021]

FIG. 1 is a cross-sectional view showing an LED lamp in a second preferred embodiment according to the invention;

FIG. 2 is a cross-sectional view showing a layer structure of the blue LED in FIG. 1;

45

FIG. 3 shows the structure of a planar light source device in a third preferred embodiment according to the invention, wherein FIG. 3(a) is a plan view and FIG. 3(b) is a sectional view cut along the line A-A in FIG. 3(a);

FIG. 4 is a cross-sectional view showing an SMD (Surface Mounted Diode) type LED lamp in a fourth preferred embodiment according to the invention;

FIG. 5 is a sectional view showing an LED lamp in a fifth preferred embodiment according to the invention;

50

FIG. 6 is a connection circuit diagram showing the case that a Zener diode is used as an overvoltage protection element;

FIG. 7 is a connection circuit diagram showing the case that a capacitor is used as an overvoltage protection element; and

FIG. 8 is a cross-sectional view showing a semiconductor light emitting device in a sixth preferred embodiment according to the invention.

55

PREFERRED EMBODIMENTS OF THE INVENTION

- [0022]** In a first preferred embodiment according to the present invention, a light emitting device comprises two different phosphors, and in this case, at least one of the phosphors is an alkaline earth metal orthosilicate phosphor. Thereby, the white tone can be particularly adjusted to be accurate.
- [0023]** In the structural modifications of a light emitting device according to the present invention, there exist many possibilities. According to a preferred embodiment, one or more LED chips are disposed on a substrate in a reflection mirror and the phosphor is dispersed in a lens disposed on the reflection mirror.
- [0024]** However, it is also possible that one or more LED chips are disposed on a substrate in a reflection mirror and the phosphor is coated on the reflection mirror.
- [0025]** The LED chips are advantageously filled with a transparent sealing compound with a dome-like shape. The sealing compound provides the mechanical protection on one hand, and the sealing compound further improves the optical property on the other hand (improved light emission of the LED die).
- [0026]** The phosphor may be dispersed in the sealing compound. By the sealing compound, the LED chips disposed on the substrate and a polymer lens are bonded without containing a gas as much as possible. In this case, the polymer lens and the sealing compound have a refraction index difference of 0.1 at the maximum. The LED die can be sealed directly by the sealing compound. However, it is also possible that the LED die is sealed with a transparent sealing compound (i.e., in this case, there are the transparent sealing compound and the sealing compound to contain the phosphor). Owing to the refraction indices close to each other, there is little loss of reflection at the interface.
- [0027]** The polymer lens advantageously has a spherical or oval dent. The dent is filled with the sealing compound. As a result, the LED array is fixed at a short distance from the polymer lens. Thereby, the mechanical structure size can be reduced.
- [0028]** To achieve a homogeneous distribution of the phosphor, it is advantageous that the phosphor is suspended advantageously in an inorganic matrix.
- [0029]** In the case that two phosphors are used, it is advantageous that the two phosphors are suspended in each matrix, and, in that case, these matrices are disposed back and forth in the light propagation direction. Thereby, the matrix concentration can be reduced compared with the case that the different phosphors are dispersed mixed together.
- [0030]** Next, an important step in the process of making a phosphor in the first preferred embodiment according to the present invention will be explained.
- [0031]** In producing a silicate phosphor, according to a selected composition ratio, alkaline earth metal carbonate, silica dioxide, and europium oxide are mixed thoroughly with each stoichiometric amount as the starting substances, and, using a conventional solid reaction used to produce a phosphor, it is converted to a desired phosphor at 1,100°C and 1,400°C temperature in reducing atmosphere. In this regard, it is advantageous to add ammonium chloride or another halide of a small ratio to the reaction mixture, preferably less than 0.2 mole thereto, to enhance the crystallization degree. If required, part of the silicon may be substituted by germanium, boron, aluminum or phosphorus, or part of the europium may be substituted by manganese. This can be carried out by adding a compound of above-mentioned respective elements, which will be decomposed by heating, by a corresponding amount. In this case, the reaction condition range is maintained.
- [0032]** The obtained silicate emits light at a wavelength of 510 nm to 600 nm, and it has a half bandwidth up to 110 nm.
- [0033]** By using one selected from the above-mentioned group of the phosphors or a combination of phosphors selected from the above-mentioned group, or a combination of a phosphor of alkaline earth metal aluminate activated by divalent europium and/or manganese, a further different phosphor to emit a red light selected from the group of $Y(V, P, Si)O_4:Eu^{2+}$, and a conventional phosphor selected from the group of $Y_2O_2S:Eu^{3+}$, an emission light color with defined color temperature and a higher color reproducibility can be obtained. This is as shown by the following examples.
- $T = 2778K$ (464 nm + $Sr_{1.4}Ba_{0.6}SiO_4:Eu^{2+}$); $x = 0.4619$, $y = 0.4247$, $Ra = 72$,
 $T = 2950K$ (464 nm + $Sr_{1.4}Ba_{0.6}SiO_4:Eu^{2+}$); $x = 0.4380$, $y = 0.4004$, $Ra = 73$,
 $T = 3497K$ (464 nm + $Sr_{1.6}Ba_{0.4}SiO_4:Eu^{2+}$); $x = 0.4086$, $y = 0.3996$, $Ra = 74$,
 $T = 4183K$ (464 nm + $Sr_{1.9}Ba_{0.08}Ca_{0.02}SiO_4:Eu^{2+}$); $x = 0.3762$, $y = 0.3873$, $Ra = 75$,
 $T = 6624K$ (464 nm + $Sr_{1.9}Ba_{0.02}Ca_{0.08}SiO_4:Eu^{2+}$); $x = 0.3101$, $y = 0.3306$, $Ra = 76$,
 $T = 6385K$ (464 nm + $Sr_{1.6}Ba_{0.4}SiO_4:Eu^{2+} + Sr_{0.4}Ba_{1.6}SiO_4:Eu^{2+}$); $x = 0.3135$, $y = 0.3397$, $Ra = 82$,
 $T = 4216K$ (464 nm + $Sr_{1.9}Ba_{0.08}Ca_{0.02}SiO_4:Eu^{2+}$); $x = 0.3710$, $y = 0.3696$, $Ra = 82$,
 $3954K$ (464 nm + $Sr_{1.6}Ba_{0.4}SiO_4:Eu^{2+} + Sr_{0.4}Ba_{1.6}SiO_4:Eu^{2+} + YVO_4:Eu^{3+}$); $x = 0.3756$, $y = 0.3816$, $Ra = 84$,
 $T = 6489K$ (464 nm + $Sr_{1.6}Ba_{0.4}SiO_4:Eu^{2+} + Sr_{0.4}Ba_{1.6}SiO_4:Eu^{2+} +$ barium magnesium aluminate: Eu^{2+}); $x = 0.3115$, $y = 0.3390$, $Ra = 66$,
 $T = 5097K$ (464 nm + $Sr_{1.6}Ba_{0.4}(Si_{0.08}B_{0.02})O_4:Eu^{2+} + Sr_{0.6}Ba_{1.4}SiO_4:Eu^{2+}$); $x = 0.3423$, $y = 0.3485$, $Ra = 82$,
 $T = 5084K$ (464 nm + $Sr_{1.6}Ba_{0.4}(Si_{0.08}B_{0.02})O_4:Eu^{2+} + Sr_{0.6}Ba_{1.4}SiO_4:Eu^{2+} +$ strontium magnesium aluminate: Eu^{2+}); $x = 0.3430$, $y = 0.3531$, $Ra = 83$,

$T = 3369K$ (464 nm + $Sr_{1.4}Ba_{0.6}Si_{0.95}Ge_{0.05}O_4: Eu^{2+}$); $x = 0.4134$, $y = 0.3959$, $Ra = 74$,

$T = 2787K$ (466 nm + $Sr_{1.4}Ba_{0.6}Si_{0.98}P_{0.02}O_{4.01}: Eu^{2+}$); $x = 0.4630$, $y = 0.4280$, $Ra = 72$,

$T = 2913K$ (464 nm + $Sr_{1.4}Ba_{0.6}Si_{0.98}Al_{0.02}O_4: Eu^{2+}$); $x = 0.4425$, $y = 0.4050$, $Ra = 73$.

[0034] In one advantageous embodiment according to the present invention, the color conversion may be performed as below.

[0035] One or more LED chips are assembled on a substrate. Directly on the substrate, a sealing material is disposed formed semi spherically or a semi elliptically (for the purpose of protecting the LED chip protection on one hand, and for the purpose of well and for emitting preferable discharge of the light generated in the LED chips on the other hand). The sealing material may separately seal each die, or it may be commonly formed for all the LED's. The substrate thus fabricated is disposed in a reflection mirror or the reflection mirror is placed on the LED chips.

[0036] A lens is installed on the reflection mirror. On one hand, the lens is used for protecting the device, and on the other hand, a fluorescent pigment is mixed in the lens. Thereby, the lens gives an impression of an opaque and yellow color. Blue light (including ultraviolet ray) passed through the lens is converted to a longer wavelength light (yellow light) when passing through the optical parts. As a result, a white color impression can further be obtained by mixing the blue light and converted light (yellow light). For example, the loss by the waveguide effect generated between flat and parallel plates can be reduced by the opaqueness and the dispersion property of the lens. Further, by the reflection mirror, only the preliminarily adjusted light is controlled to be entered into the lens. As a result, the total reflection effect can be reduced from the beginning.

[0037] Alternatively, the reflection mirror may be placed on each LED chip, and the reflection mirror is filled in a dome-like shape, and further, the lens is disposed above each reflection mirror or above the entire device.

[0038] It is advantageous to use an LED array instead of a single LED in the production of the light emitting device for illumination. In another advantageous embodiment of the present invention, the color conversion may be executed by the LED array with the LED chips assembled directly on a substrate as follows.

[0039] Using a sealing compound (such as an epoxy resin), an LED array is bonded with a transparent polymer lens made from another material (such as a PMMA). The materials of the polymer lens and the sealing compound are selected so as to have refraction indices as close as possible, that is, with the phase matching. The sealing compound exists in the maximum spherical or elliptic dent of the polymer lens. The shape of the dent is important in the point that the cover conversion substance is dispersed in the sealing compound. Therefore, according to the shape, obtainment of the light emission color regardless of the angle can be ensured. In addition, the above-mentioned array can be filled with a transparent sealing compound, and further, it can be bonded with the above-mentioned polymer lens using the sealing compound containing the color conversion substance.

[0040] For an LED having a particularly preferable color reproductivity using at least two different phosphors, it is advantageous to disperse the phosphors separately, and superimpose the same instead of dispersing the phosphors together in one matrix. This is applied in particular to a combination for obtaining the final light emission color by a plurality of color conversion processes. That is, the light emission color with the longest wavelength is produced by one light emission process. In this case, the light emission process is carried out as follows: that is, absorption of the LED light emission by a first phosphor, light emission by the first phosphor, absorption of the light emission of the first phosphor by a second phosphor, and the light emission by the second phosphor. In particular, for this kind of the process, it is advantageous to dispose the phosphors back and force in the light propagation direction because the concentration of the phosphors can be reduced thereby compared with the case of simply dispersing various phosphors.

[0041] The present invention is not limited to the above-mentioned embodiments. The phosphors may be assembled in a polymer lens (or another optical part). The phosphors may be disposed directly on the LED die, or it may be disposed on the surface of the transparent sealing compound. Moreover, the phosphors may be assembled in a matrix together with dispersed particles. Thereby, precipitation in the matrix can be prevented and homogeneous light emission can be ensured.

The above-described example of the use of a phosphor having photoluminescence effect in a light emitting diode (LED) lamp will be explained in more detail.

[0042] FIG. 1 is a typical cross-sectional view of an LED lamp according to a second embodiment of the light emitting device according to the invention. The LED lamp shown in FIG. 1 is the so-called "lens-type LED lamp." A blue LED 4 formed of a GaN semiconductor is mounted through a mount 5 on a metal stem 3 that forms a cup 10 which functions as a reflection mirror for reflecting, above the LED lamp, light emitted from the blue LED 4. One electrode of the blue LED 4 is connected to a lead frame 2 through a gold bonding wire 7, and the other electrode is connected to a lead frame 1 through a gold bonding wire 6. The inside of the cup 10 is filled with an internal resin 8 as a coating member to fix the blue LED 4. Further, the lead frame 2 and the lead frame 1 provided with the metal stem 3 are covered with an external resin 9 as a mold member. Therefore, the blue LED 4 is double covered with the internal resin 8 and the external resin 9. The metal stem 3 and the lead frame 1 are also referred to as a mount lead. The blue LED 4 will be explained below in more detail.

[0043] The internal resin 8 containing a phosphor 11 is filled into the cup 10 to a level below the level surface of the

upper edge of the cup 10. When a plurality of LEDs are disposed close to each other in this way, this construction can prevent mixing of colors between LEDs and can realize a flat display using LEDs to produce images with high resolution.

[0044] Regarding the internal resin 8, a silicone resin or an epoxy resin is used which becomes transparent upon curing. The internal resin 8 contains a phosphor 11 composed mainly of the divalent europium-activated alkaline earth metal orthosilicate and/or an alkaline earth metal orthosilicate. As described above, the phosphor 11 has photoluminescence effect. Specifically, the phosphor 11 absorbs light emitted from the blue LED 4 and emits light with a wavelength different from the wavelength of the absorbed light.

[0045] Instead of the silicone resin or the epoxy resin, low melting glass may be used as the internal resin 8. The low melting glass has excellent moisture resistance and, at the same time, can prevent the entry of harmful ions into the blue LED 4. Further, light emitted from the blue LED 4 as such can be passed through the low melting glass without absorption into the glass. Therefore, there is no need to emit light with higher intensity in expectation of light absorption.

[0046] Further, a scattering material may be incorporated into the silicone resin or epoxy resin as the internal resin 8 with the phosphor 11 incorporated therein or the low melting glass with the phosphor 11 incorporated therein. The scattering material irregularly reflects light emitted from the blue LED 4 to produce scattered light. Therefore, light from the blue LED 4 is more likely to apply to the phosphor 11, whereby the quantity of light emitted from the phosphor 11 can be increased. The scattering material is not particularly limited, and any well known material may be used.

[0047] Regarding the external resin 9, an epoxy resin may be used which becomes transparent upon curing.

[0048] Various resins, such as epoxy resin, may be used in the mount 5 from the viewpoint of good handleability. Preferably, the resin used in the mount 5 has adhesive properties and, in addition, has insulating properties from the viewpoint of avoiding, even when the mount 5 is pushed out toward the side face of the very small blue LED 4, a short circuit between the layers at the side face.

[0049] The mount 5 is formed of a transparent resin so that light emitted isotropically from the blue LED 4 can be passed through the transparent resin, reflected from the reflection mirror on the surface of the cup 10, and emitted above the LED lamp. In particular, when the LED lamp is used as a white light source, the color of the mount 5 may be white which does not hinder white light.

[0050] The mount 5 may contain a phosphor 11. In the case of the LED lamp using the phosphor 11, the optical density is much higher than that in the case of an LED lamp not using the phosphor 11. Specifically, since light emitted from the blue LED 4 does not pass through the phosphor 11, the light emitted from the blue LED 4 is reflected from the phosphor 11 provided near the blue LED 4, is newly isotropically emitted as light excited by the phosphor 11, is also reflected from the reflection mirror on the surface of the cup 10, and is further reflected due to a difference in refractive index between the individual sections of the LED lamp. Therefore, light is partially densely confined in a portion near the blue LED 4 to render the optical density near the blue LED 4 very high, contributing to emission of light with high luminance from the LED lamp.

[0051] The blue LED 4 isotropically emits light, and the emitted light is also reflected from the surface of the cup 10. These lights are passed through the mount 5, and, thus, the optical density within the mount 5 is very high. Accordingly, the incorporation of the phosphor 11 into the mount 5 permits these lights emitted from the blue LED 4 to be reflected from the phosphor 11 contained in the mount 5 and to be newly isotropically emitted as light excited by the phosphor 11 contained in the mount 5. Thus, the incorporation of the phosphor 11 also into the mount 5 can further enhance the luminance of light emitted from the LED lamp.

[0052] Further, the mount 5 may be formed of a resin containing an inorganic material such as silver. Since a resin, such as epoxy resin, is used in the mount 5 and the internal resin 8, when the high-luminance LED lamp is used for a long period of time, the internal resin 8 or the mount 5, formed of a synthetic resin, in its portion very close to the blue LED 4 is brown or black colored and deteriorated, leading to lowered emission efficiency. In particular, the coloration of the mount 5 in its portion close to the blue LED 4 significantly lowers the emission efficiency. Not only resistance to light (weathering resistance) emitted from the blue LED 4 but also adhesion, intimate contact and the like are required of the mount 5. The problem of the deterioration in resin caused by light can be solved by using a resin containing an inorganic material, such as silver, in the mount 5. The mount 5, which can meet these property requirements, can be simply formed by mixing a silver paste and a phosphor 11 with a mount paste, coating the mixture on the metal stem 3 by means of mount equipment and then bonding the blue LED 4 to the coating.

[0053] The mount 5 may be formed of, in addition to a silver-containing epoxy resin, a silicone resin as an inorganic material-containing organic resin. The inorganic material contained in the mount 5 should be brought into intimate contact with the resin, i.e., should have good adhesion to the resin and, at the same time, should not be deteriorated by light emitted from the blue LED 4. To meet these requirements, at least one inorganic material is selected from silver, gold, aluminum, copper, alumina, silica, titanium oxide, boron nitride, tin oxide, zinc oxide, and ITO, and is incorporated into the resin. In particular, silver, gold, aluminum, copper and the like can improve heat radiation and is electrically conductive and thus can be applied to semiconductor devices expected to have electrical conductivity. Alumina, silica, titanium oxide, boron nitride and the like have high weathering resistance and permits the mount 5 to maintain high reflectance. The inorganic material may be in various forms, for example, spherical, acicular, or flaky

form, which may be determined by taking into consideration, for example, dispersibility and electrical conductivity. In the mount 5, the heat radiation, the electrical conductivity and the like may be regulated to respective various levels by varying the content of the inorganic material in the resin. Since, however, increasing the content of the inorganic material in the resin causes no significant deterioration in resin but deteriorates the adhesion, the inorganic material content is not less than 5% by weight and not more than 80% by weight. An inorganic material content of not less than 60% by weight and not more than 80% by weight is better suited for the prevention of the deterioration of the resin.

[0054] In this way, the incorporation of an inorganic material, such as silver, which is less likely to be deteriorated upon exposure to the emitted light, into the blue LED 4, can suppress a deterioration in the resin in the mount 5 by the light. Therefore, the incorporation of an inorganic material can reduce colored sites caused by the deterioration, can prevent a lowering in emission efficiency, and can provide good adhesion (intimate contact). The incorporation of the phosphor 11 also into the mount 5 can further enhance the luminance of the LED lamp.

[0055] This can realize the provision of an LED lamp which can emit light with high luminance and causes only a very low lowering in emission efficiency even after use with high luminance for a long period of time. Further, the use of a material having high heat conductivity can stabilize the characteristics of the blue LED 4 and can reduce irregular color.

[0056] FIG. 2 shows the layer structure of the blue LED 4 of the LED lamp shown in FIG. 1. The blue LED 4 comprises a transparent substrate, for example, a sapphire substrate 41. For example, a buffer layer 42, an n-type contact layer 43, an n-type cladding layer 44, an MQW (multi-quantum well) active layer 45, a p-type cladding layer 46, and a p-type contact layer 47 are formed in that order as nitride semiconductor layers, for example, by MOCVD, on the sapphire substrate 41. Thereafter, a light-transparent electrode 50 is formed on the whole surface of the p-type contact layer 47, a p electrode 48 is formed on apart of the light-transparent electrode 50, and an n electrode 49 is formed on a part of the n-type contact layer 43. These layers may be formed, for example, by sputtering or vacuum deposition.

[0057] The buffer layer 42 may be formed of, for example, AlN, and the n-type contact layer 43 may be formed of, for example, GaN.

[0058] The n-type cladding layer 44 may be formed of, for example, $\text{Al}_y\text{Ga}_{1-y}\text{N}$ wherein $0 \leq y < 1$, the p-type cladding layer 46 may be formed of, for example, $\text{Al}_x\text{Ga}_{1-x}\text{N}$ wherein $0 < x < 1$, and the p-type contact layer 47 may be formed of, for example, $\text{Al}_z\text{Ga}_{1-z}\text{N}$ wherein $0 \leq z < 1$ and $z < x$. The band gap of the p-type cladding layer 46 is made larger than the band gap of the n-type cladding layer 44. The n-type cladding layer 44 and the p-type cladding layer 46 each may have a single-composition construction, or alternatively may have a construction such that the above-described nitride semiconductor layers having a thickness of not more than 100 angstroms and different from each other in composition are stacked on top of each other so as to provide a superlattice structure. When the layer thickness is not more than 100 angstroms, the occurrence of cracks or crystal defects in the layer can be prevented.

[0059] The MQW active layer 45 is composed of a plurality of InGaN well layers and a plurality of GaN barrier layers. The well layer and the barrier layer have a thickness of not more than 100 angstroms, preferably 60 to 70 angstroms, so as to constitute a superlattice structure. Since the crystal of InGaN is softer than other aluminum-containing nitride semiconductors, such as AlGaIn, the use of InGaN in the layer constituting the active layer 45 can offer an advantage that all the stacked nitride semiconductor layers are less likely to be cracked. The MQW active layer 45 may also be composed of a plurality of InGaIn well layers and a plurality of AlGaIn barrier layers. Alternatively, the MQW active layer 45 may be composed of a plurality of AlInGaIn well layers and a plurality of AlInGaIn barrier layers. In this case, the band gap energy of the barrier layer is made larger than the band gap energy of the well layer.

[0060] A reflecting layer may be provided on the sapphire substrate 41 side from the MQW active layer 45, for example, on the buffer layer 42 side of the n-type contact layer 43. The reflecting layer may also be provided on the surface of the sapphire substrate 41 remote from the MQW active layer 45 stacked on the sapphire substrate 41. The reflecting layer preferably has a maximum reflectance with respect to light emitted from the active layer 45 and may be formed of, for example, aluminum, or may have a multi-layer structure of thin GaN layers. The provision of the reflecting layer permits light emitted from the active layer 45 to be reflected from the reflecting layer, can reduce the internal absorption of light emitted from the active layer 45, can increase the quantity of light output toward above, and can reduce the incidence of light on the mount 5 to prevent a deterioration in the mount 5 caused by the light.

[0061] The half value width of the light-emitting wavelength of the blue LED 4 having the above construction is not more than 50 nm, preferably not more than 40 nm. The peak light-emitting wavelength of the blue LED 4 is in the range of 380 nm to 500 nm, for example, is 450 nm.

[0062] In the LED lamp having the above construction, upon the application of a voltage across the lead frames 1, 2, the blue LED 4 emits blue light with a wavelength of 450 nm. The blue light excites the phosphor 11 contained in the internal resin 8, and the excited phosphor 11 emits yellow light with a wavelength of 560 to 570 nm. The mixed light, composed of blue light and yellow light, in the internal resin 8 is passed through the external resin 9, and is leaked to the exterior. In this case, the mixed light is seen white to the naked eye of the human being, and, consequently, the LED lamp is seen as if the LED lamp emits white light. Specifically, the phosphor 11 is excited by blue light emitted from the blue LED 4 and emits light of yellow which has a complementary color relationship with blue and has a longer

wavelength than blue. According to the invention, a more nearly pure white color can be produced through a combination of a plurality of phosphors.

[0063] FIG. 3 shows a structure of a planar light-source device involving a third preferred embodiment of the light-emitting device according to the present invention, wherein FIG. 3(a) is a plan view thereof and FIG. 3(b) is a cross-sectional view cut along the line A-A of FIG. 3 (a).

[0064] The planar light-source device shown in FIG.3 is applied, for example, to the backlight device of a liquid crystal panel. By illuminating the liquid crystal panel from the backside thereof to render brightness or contrast to a character or an image on the liquid crystal panel not having a light-emitting property, it enhances the visibility of the character or the image. The planar light-source device is provided with and composed of the following elements.

[0065] That is, the planar light-source device comprises a transparent and substantially rectangular optical guide plate 70, a plurality of blue LEDs 4 that are optically connected with the optical guide plate 70 by being arranged in an array and buried in a side of the optical guide plate 70, a light reflecting case 71 for reflecting light which surrounds other faces than a light-emitting face 70a of the optical guide plate 70 and fixed to the optical guide plate 70, a light scattering pattern 73 comprising systematic and fine convex-concave patterns formed on a light reflecting face 72 opposing to the light-emitting face 70a of the optical guide plate 70, a transparent film 74 being fixed to the optical guide plate 70 such that the light-emitting face 70a is covered, and containing a phosphor 11 inside thereof.

[0066] Further, each of the blue LEDs 4 is fixed to the light reflecting case 71 such that driving voltage of a predetermined voltage is supplied via a power supplying means such as a bonding wire and a lead frame from a power source. The light scattering pattern 73 is provided to scatter the light emitted from the blue LEDs 4 in the inside of the optical guide plate 70.

[0067] In the planar light-source device composed like this, when driving voltage is applied to each blue LED 4, light is emitted from each blue LED 4, which was driven. The light emitted travels within the optical guide plate 70 towards a predetermined direction and collides with the light scattering pattern 73 formed on the light reflecting face 72, whereby being reflected and scattered, the light is emitted from the emitting-face 70a through the film 74 as planar emitting-light. Part of the light emitted from the blue LEDs 4, when it passes through the film 74, is absorbed by the phosphor 11, and simultaneously with this, the wavelength conversion thereof is performed to be emitted. This results in that a color of the emitted light, which is observed from the front of the film 74, becomes a resultant color mixed with such light, for example, white as the above-mentioned principle. Like this, according to the planar light-source device of the third preferred embodiment, the light emitted from the blue LEDs 4 is inputted into the optical guide plate 70, then the inputted light, while being reflected to scatter by the light scattering pattern 73 formed on the reflecting face 72 of the optical guide plate 70, is emitted from the emitting face 70a to the film 74, and in the film 74, the light is partly absorbed by the phosphor 11, and at the same time, the conversion of wavelength thereof is performed to be emitted. Therefore, it is possible to make the color of the emitted light white, without using LEDs of each color of red, green and blue as in conventional cases, with blue LEDs 4 only. Moreover, in this structure, since the phosphor 11 and the blue LED 4 do not directly contact to each other, the deterioration of the phosphor 11 can be suppressed for a long period, whereby a predetermined color tone of the planar light source can be held for a long period.

[0068] Besides, by changing the kind of the phosphor 11 to be contained in the film 74, it becomes possible to realize a color of the emitted light of not only white but also other colors. If the fixing structure of the film 74 is made a readily removable one, and a plural kinds of films 74 each containing different kind of phosphor 11 from the others are prepared, the color tone of the planar light source can be easily varied by only changing the film 74.

[0069] Further, the phosphor 11, besides the method to make it contained in the film 74, may be coated on the film 74, and in this case, also, a similar effect to that in the case of being contained can be obtained.

[0070] Furthermore, although the blue LED 4 are optically connected with the optical guide plate 70 by being buried into the optical guide plate 70, besides this, the blue LED 4 and the optical guide plate 70 may be optically connected by adhering the blue LED 4 to the end face of the optical guide plate 70, or by guiding the light emitted from the blue LED 4 to the end face of the optical guide plate 70 with an optical transmission means such as an optical fiber. Moreover, the number of the blue LED 4 to be employed may be made to one.

[0071] FIG.4 shows an LED lamp of SMD (Surface Mounted Device) type involving a fourth embodiment of the light-emitting device according to the present invention.

[0072] The SMD-type LED lamp has a structure as described below. A metal frame is formed by two wiring patterns of gold 81 and 82 covering the both surfaces of a substrate 80 of glass epoxy resin with an insulating property, and being formed to be electrically separated from each other. Over the wiring patterns 81 and 82, a frame 83 having a plastic-made cup 83a is provided. The surface of the cup 83a constitutes a reflection mirror, which reflects light emitted from the blue LED 4. The wiring pattern 81 and 82 are not symmetrical. The upper surface of the wiring pattern 82 is formed as far as the center of the bottom of a space formed by the frame 83, while the other wiring pattern 81 is exposed a little to the bottom of the space formed by the frame 83.

[0073] The blue LED 4 is adhered firmly to the upper surface of the wiring pattern 82 with epoxy resin paste containing silver filaments. A p-electrode of the blue LED 4 and the wiring pattern 82 are connected with a bonding wire of gold

6, and an n-electrode of the blue LED 4 and the wiring pattern 81 are connected with a bonding wire of gold 7.

[0074] The inside of the space formed by the cup 83a of the frame 83 is filled with a sealing material 88 which becomes transparent after curing thereof. The blue LED 4 is fixed by the sealing material 88. The sealing material 88 contains the phosphor 11 mainly composed of alkaline earth metal orthosilicate activated by bivalent europium and/or alkaline earth metal orthosilicate. The sealing material 88 comprises epoxy resin or silicone resin. The sealing material 88 containing the phosphor 11 may be filled in the whole space formed by the cup 83a of the frame 83, or may be filled up to a position below the upper edge of the frame 83.

[0075] Meanwhile, the sealing material 88 containing the phosphor 11 may further contain a scattering material. The scattering material causes irregular reflection of the light emitted from the blue LED 4, which changes the light to scattered light. Consequently, the light from the blue LED 4 becomes easy to strike the phosphor 11, whereby quantity of light to be emitted from the phosphor 11 can be increased. The scattering material is not limited to any particular one, but well-known scattering materials can be used.

[0076] In the SMD-type LED lamp composed like this, when a voltage is applied between the wiring patterns 81 and 82, the blue LED 4 emits blue light having a wavelength of 450 nm. The blue light excites the phosphor 11 contained in the sealing material 88, and the excited phosphor 11 emits yellow light of 560 to 570 nm. The mixed light constituted of the blue light and the yellow light in the sealing material 88 comes through the sealing material 88 to the outside thereof, which looks white to human eyes. As a result, the LED lamp looks as if it were emitting white light. That is, the phosphor 11 is excited by the blue light emitted from the blue LED 4, and emits yellow light which is in a complementary color relation with blue and having a longer wavelength than that of blue. According to the present invention, by combining a plurality of phosphor, white light which is nearly pure white can be obtained.

[0077] FIG. 5 is a schematic diagram showing an LED lamp according to a fifth preferred embodiment of a light emitting device of the present invention. In the present embodiment, a blue LED 4 is arranged in such that it can be protected from over voltage of static electricity and the like, and a constitution of which is the one wherein an overvoltage protection element 91 is added to a light source shown in FIG. 1.

[0078] As shown in FIG. 5, the overvoltage protection element 91 is fabricated in a chip having a size substantially equal to that of the blue LED 4, and the protection element is located in between the blue LED 4 and a mount 5. In the present embodiment, the blue LED 4 is mounted in the form of flip chip different from the case of FIG. 1 from the reason mentioned later. The overvoltage protection element 91 is provided with electrodes 92 and 93 for connecting with the blue LED 4 and a lead frame 1. The electrode 92 is located at a position opposed to that of the p-electrode 48 shown in FIG. 2, while the electrode 93 is located at a position opposed to that of the n-electrode 49. Furthermore, the electrode 93 is formed so as to extend to a side of the overvoltage protection element 91 in order to be easily connected with a bonding wire 6. The electrodes 92 and 93 on the overvoltage protection element 91 are connected with the p-electrode 48 and the n-electrode 49 of the blue LED 4 through Au bumps 94a and 94b, respectively. The overvoltage protection element 91 may be a Zener diode, which is energized in the case when a voltage more than a specified voltage is applied, or a condenser, which absorbs pulse voltage, and the like components.

[0079] FIG. 6 is a connection circuit diagram showing a case wherein a Zener diode is used for the overvoltage protection element 91. The Zener diode 95 used for the overvoltage protection element 91 is electrically connected in parallel to the blue LED 4 wherein an anode of the blue LED 4 is connected with a cathode of the Zener diode 95, while a cathode of the blue LED 4 is connected with an anode of the Zener diode 95. In the case when an over voltage was applied between a lead frame 1 and a lead frame 2 and if the voltage is over a Zener voltage of the Zener diode 95, a terminal voltage of the blue LED 4 is held by the Zener voltage, so that the former voltage does not over the Zener voltage. Thus, the blue LED 4 can be prevented from application of an over voltage, so that the blue LED 4 is protected from an over voltage, whereby the blue LED 4 can be prevented from occurrence of device breakdown or deterioration in performance thereof.

[0080] FIG. 7 is a connection circuit diagram showing a case wherein a condenser is used for the overvoltage protection element 91. The condenser 96 used for the overvoltage protection element 91 may be a chip type component used for surface mount. The condenser 96 having a structure as described above is provided with belt-like electrodes on the opposite sides thereof, and these electrodes are connected in parallel to an anode and a cathode of the blue LED 4. When an over voltage is applied across a frame lead 1 and a frame lead 2, a charging current flows through the condenser 96 due to the over voltage to drop instantaneously its terminal voltage, whereby an applied voltage does not rise with respect to the blue LED 4. Hence, the blue LED 4 can be prevented from an over voltage.

[0081] Furthermore, even when noise containing a high-frequency component was applied, the condenser 96 functions as a bypass condenser, so that exogenous noise can be excluded.

[0082] As described above, the blue LED 4 has been mounted in the form of flip chip, which is turned upside down with respect to a posture shown in FIG. 1. The reason of which is in that electrical connections are required for both the overvoltage protection element 91 and the blue LED 4 as a result of providing the overvoltage protection element 91. If each of the blue LED 4 and the overvoltage protection element 91 is connected with the use of a bonding wire, the number of bonding wire increases so that productivity thereof decreases, besides, since cases of contact, discon-

nection and the like of the bonding wires themselves increase, whereby there is a fear of deterioration in reliability. Thus, the blue LED 4 is mounted in the form of flip chip. More specifically, the bottom of the sapphire substrate 41 shown in FIG. 2 is located at the uppermost position wherein the p-electrode 48 is connected to the electrode 92 of the overvoltage protection element 91 through the Au bump 94a, while the n-electrode 49 is connected to the electrode 93 of the overvoltage protection element 91 through the Au bump 94b. As a result, there is no need of connecting the bonding wires 6 and 7 with the blue LED 4. In the case where the blue LED 4 is mounted in the form of flip chip, the light transparent electrode 50 shown in FIG. 2 may be replaced by a non-light transparent electrode. Moreover, it may be arranged in such that the n-electrode 49 is thickened so as to have the same height as that of the surface of the p-electrode 48, or a novel conductor is connected to the n-electrode 42, so that it can be used as an electrode.

[0083] As described above, according to the constitution shown in FIG. 5, there is an advantage of providing no case where the blue LED 4 is damaged or deteriorated in performance even if an over voltage is applied due to static electricity and the like in addition to a standard advantage as a light source in accordance with the constitution shown in FIG. 1. Furthermore, since the overvoltage protection element 91 functions as a submount, even if the blue LED 4 has been mounted in the form of flip chip, there is no case of lowering a height of bonding positions of the bonding wires 6 and 7 on the side of the chip. Accordingly, bonding can be conducted at a position substantially the same as that of a case of the constitution of FIG. 1.

[0084] In the case where a semiconductor device is used for the overvoltage protection element 9 in FIGS. 5 and 6, a general silicon diode may be used in place of the Zener diode. In this case, the number of silicon diodes is decided in accordance with such a manner that polarities of a plurality of silicon diodes are made to be the same with each other, and they are connected in series with each other, so that a value of a total voltage drop in forward direction (about 0.7 V x the number of silicon diodes) becomes equal to operating voltage with respect to over voltage.

[0085] Moreover, a variable resistor may also be used for the overvoltage protection element 91. The variable resistor has such a characteristic that its resistance value decreases with increase of an applied voltage, whereby the variable resistor can suppress an over voltage as in the case of the Zener diode 95.

[0086] FIG.8 shows a semiconductor light emitting device according to the sixth preferred embodiment of the present invention.

[0087] The semiconductor light emitting device shown in FIG.8, in which a light emitted from a light emitting element is wavelength-converted and radiated to the outside of a lens-shaped resin sealant, comprises lead frames 1, 2, a metal stem 3, a blue LED 4, a mount 5, bonding wires 6, 7, an internal resin 8 not containing a phosphor 11, an external resin 9, a cup 10, and further comprises a phosphor cover 100 which is transparent.

[0088] Still, the phosphor cover 100 is made of, for example, a resin backing material containing the phosphor 11, which generates fluorescence when the phosphor 11 is excited by a light emitted from the blue LED 4. The resin backing material is, for instance, transparent polyester resin, acrylic resin, urethane, nylon, silicone resin, chloroethylene, polystyrene, bakelite, CR39 (acryl glycol carbonate resin), etc. Since urethane, nylon and silicone resin add some elasticity to the phosphor cover 100, mounting thereof on the external resin 9 will be easier.

[0089] Further, the phosphor cover 100 is shaped to adhere to the outer surface of the external resin 9, that is, shaped into a solid construction with a semispherical cover integrated into the upper part of a cylindrical cover, and mounted detachably onto the external resin 9. Moreover, the phosphor cover 100 is preferably a thin film so as to reduce the light scattering due to the phosphor 11. Furthermore, the phosphor cover 100 can be fabricated relatively easily, when a resin containing the phosphor 11 is shaped into a predetermined form by injection molding then adhered to the external resin 9. However, the phosphor cover 100 may be fabricated by spraying a resin material containing the phosphor 11 directly onto the external resin 9 and curing the resin material, so that air gap does not appear between the external resin 9 and the phosphor cover 100.

[0090] In the semiconductor light emitting device with the above structure, a light emitted from the blue LED 4 is incident to the phosphor cover 100 via the internal resin 8 and the external resin 9. A part of the incident light is absorbed by the phosphor 11, and simultaneously emitted to the outside after wavelength conversion. Accordingly, the color of the emitted light that is observed from outside the phosphor cover 100 becomes the color synthesizing the lights, such as white according to the aforementioned principle, for instance.

[0091] Thus, according to the sixth preferred embodiment of the semiconductor light emitting device, the light scattering due to the phosphor 11 will not occur in the internal resin 8 and the external resin 9, because the internal resin 8 and the external resin 9, which are resin sealants of the blue LED 4, do not contain the phosphor 11, while the phosphor cover 100 for covering the external surface of the external resin 9 contains the phosphor 11. Further, since the phosphor cover 100 is shaped to be a thin film, the light scattering due to the phosphor 11 is relatively small. Accordingly, by shaping the lens portion of the external resin 9 into an arbitrary form (which is semispherical in this preferred embodiment), a desired light directivity can be obtained so that decrease in luminance accompanied with wavelength conversion can be suppressed to minimum.

[0092] Beyond that, by changing a type of the phosphor 11 that is contained in the backing material of the phosphor cover 100, emitted lights with colors other than white can be realized. When the phosphor cover 100 has an easy-to-

detach structure and several types of the phosphor cover 100 containing different types of the phosphor 11 are prepared, a color tone of emitted light can be varied easily by changing the phosphor cover 100.

[0093] Further, the similar effect can be obtained when the phosphor 11 is applied on the surface of the phosphor cover 100 instead of being contained in the phosphor cover 100. Moreover, since the phosphor cover 100 can be mounted on a commercially available semiconductor light emitting device, the semiconductor light emitting device can be fabricated at a low cost.

INDUSTRIAL APPLICABILITY

[0094] As described above, the light emitting device comprising a light emitting element and a phosphor according to the present invention is suitable for an LED display, a backlight device, a signal, an illuminated switch, various sensors and various indicators.

Claims

1. A light emitting device, comprising: a light emitting element comprising a nitride semiconductor; and a phosphor which can absorb a part of light emitted from said light emitting element and can emit light of wavelength different from that of said absorbed light,

wherein:



said phosphor comprises alkaline earth metal silicate.

2. A light emitting device wherein:

said phosphor comprises europium-activated alkaline earth metal silicate.

3. A light emitting device according to claim 1, wherein:

said phosphor is divalent-europium-activated alkaline earth metal orthosilicate represented by formula:





wherein $0 < x < 1.6$,

$0.005 < y < 0.5$, and

$0 < a, b, c$, and $d < 0.5$, and/or

divalent-europium-activated alkaline earth metal orthosilicate represented by formula:



wherein $0.01 < x < 1.6$,

$0.005 < y < 0.5$, and

$0 < a, b, c$, and $d < 0.5$,

with the proviso that at least one of a, b, c, and d values is advantageously greater than 0.01.

4. A light emitting device according to claim 1, wherein:

said phosphor is mixed into a covering member which covers said light emitting element.

5. A light emitting device according to claim 4, wherein:

said covering member comprises silicone resin.

6. A light emitting device according to claim 4, wherein:

5 said covering member comprises epoxy resin.

7. A light emitting device according to claim 4, wherein:

10 said covering member comprises low-melting glass.

8. A light emitting device according to any one of claims 4 to 7, wherein:

15 said phosphor is mixed with a covering member which covers said light emitting element and a scattering agent is also mixed with the covering member.

9. A light emitting device according to any one of claims 4 to 8, wherein:

said covering member is further covered by a second transparent covering member.

20 10. A light emitting device according to claim 1, wherein:

said light emitting element comprises a light emitting layer containing indium.

11. A light emitting device according to claim 1 or 10, wherein:

25 said light emitting element comprises a double hetero structure comprising a light emitting layer sandwiched between a p-type clad layer and an n-type clad layer.

12. A light emitting device according to claim 11, wherein:

30 said p-type clad layer is formed of $\text{Al}_x\text{Ga}_{1-x}\text{N}$ where $0 < x < 1$, and
said n-type clad layer is formed of $\text{Al}_y\text{Ga}_{1-y}\text{N}$ where $0 \leq y < 1$.

13. A light emitting device according to claim 11 or 12, wherein:

35 the band gap of said p-type clad layer is larger than that of said n-type clad layer.

14. A light emitting device according to claim 10, wherein:

40 said light emitting layer of said light emitting element comprises a quantum well structure.

15. A light emitting device according to claim 14, wherein:

45 said quantum well structure comprises a well layer of InGaN and a barrier layer of GaN.

16. A light emitting device according to claim 14, wherein:

said quantum well structure comprises a well layer of InGaN and a barrier layer of AlGaIn.

50 17. A light emitting device according to claim 14, wherein:

said quantum well structure comprises a well layer of AlInGaIn and a barrier layer of AlInGaIn, and

the band gap energy of said barrier layer is larger than that of said well layer.

55 18. A light emitting device according to claim 14, wherein:

said well layer has a thickness of not more than 100 angstroms.

19. A light emitting device according to claim 1, wherein:

said p-type clad layer and/or said n-type clad layer have a superlattice structure formed stacking nitride semiconductor layers that are different from each other or one another in composition.

5

20. A light emitting device according to claim 1, wherein:

said light emitting element is fixed onto a frame using an insulating adhesive.

10

21. A light emitting device according to claim 20, wherein:

said adhesive is colorless and transparent.

22. A light emitting device according to claim 20 or 21, wherein:

15

said adhesive contains said phosphor that comprises a material selected from said groups of alkaline earth metal silicates.

23. A light emitting device according to claim 20, wherein:

20

said adhesive is white.

24. A light emitting device according to claim 1, wherein:

25

said light emitting element comprises a transparent substrate and a nitride semiconductor grown by vapor phase epitaxy on said transparent substrate.

25. A light emitting device according to claim 24, wherein:

30

said substrate is of sapphire.

26. A light emitting device according to claim 24, wherein:

35

said light emitting element comprises a light reflecting layer.

27. A light emitting device according to claim 26, wherein:

40

said light reflecting layer is provided on a surface of the substrate opposite to the surface of the substrate on which the light emitting layer is formed.

28. A light emitting device according to claim 27, wherein:

said light reflecting layer is of aluminum.

45

29. A light emitting device according to claim 24, wherein:

said light reflecting layer comprises multiple GaN-based thin layers.

30. A light emitting device according to claim 1, wherein:

50

the half-value width of a wavelength emitted from said light emitting element is not more than 50 nm.

31. A light emitting device according to claim 1, wherein:

55

the half-value width of a wavelength emitted from said light emitting element is not more than 40 nm.

32. A light emitting device according to claim 1, wherein:

EP 1 347 517 A1

said light emitting element has a peak emission wavelength of 380 nm to 500 nm.

33. A light emitting device according to claim 1, wherein:

5 said phosphor has a main emission wavelength which is longer than the main peak emission wavelength of said light emitting element.

34. A light emitting device according to claim 1, wherein:

10 said light emitting element comprises a substantially rectangular light guide plate such that light emitted from the light emitting element is introduced thereinto and is output from its light output surface, and said phosphor is provided in a sheet form on the light output surface of said light guide plate.

35. A light emitting device, comprising:

15 a light emitting element of a GaN semiconductor disposed in a cup of a mount lead;
a phosphor which can absorb a part of light emitted from said light emitting element and can emit light of wavelength different from that of said absorbed light;
a coating member with which the inside of said cup has been filled, said coating member comprising a sealant containing said phosphor; and
20 a mold member which covers said coating member, said light emitting element, and the tip portion of said mount lead,

wherein:

25 said phosphor comprises a member selected from groups of alkaline earth metal silicates.

36. A light emitting device, comprising:

30 a casing;
a light emitting element comprising a LED chip which has been mounted within said casing by flip-chip bonding, said LED chip being formed of a GaN compound semiconductor;
a phosphor which can absorb a part of light emitted from said LED chip and can emit light of wavelength different from that of said absorbed light; and
35 a mold member with which the inside of the LED chip-mounted casing has been filled, said mold member comprising a transparent sealant containing said phosphor,

wherein:

40 said phosphor comprises a member selected from groups of alkaline earth metal silicates, and said light emitting device radiates white light as a result of mixing of said light emitted from said LED chip with said light emitted from said phosphor.

37. A light emitting device according to claim 35 or 36, wherein:

45 said light emitting element has, on its one side, a p-side electrode and an n-side electrode and is provided on a metal frame, said p-side electrode and said n-side electrode each have been wire bonded by gold wire, and said light emitting element emits blue light upon the application of a voltage supplied via said gold wire.

50 **38. A light emitting device according to claim 35 or 36, wherein:**

said light emitting element is provided within said cup, and said phosphor is provided so as to cover said light emitting element and to locate at a position below the upper edge of the cup.

55 **39. A light emitting device according to claim 1, further comprising:**

a protection element for protecting said light emitting element from static electricity.

EP 1 347 517 A1

40. A light emitting device according to claim 39, wherein:

said protection element is a Zener diode or a capacitor.

5 41. A light emitting device according to claim 39, wherein:

said protection element is a submount formed of a Zener diode, and
said light emitting element is provided on said submount, and said phosphor covers the periphery of said light
emitting element.

10

42. A light emitting device, comprising:

a light emitting element of a GaN compound semiconductor provided in a cup of a mount lead;
a phosphor which can absorb a part of light emitted from said light emitting element and can emit light of
wavelength different from that of said absorbed light; and
a mold member which covers said light emitting element and the tip portion of said mount lead,

15

wherein:

said phosphor comprises a member selected from groups of alkaline earth metal silicates and is contained in
a resin base material constituting a phosphor cover which covers said mold member.

20

25

30

35

40

45

50

55

Fig. 1

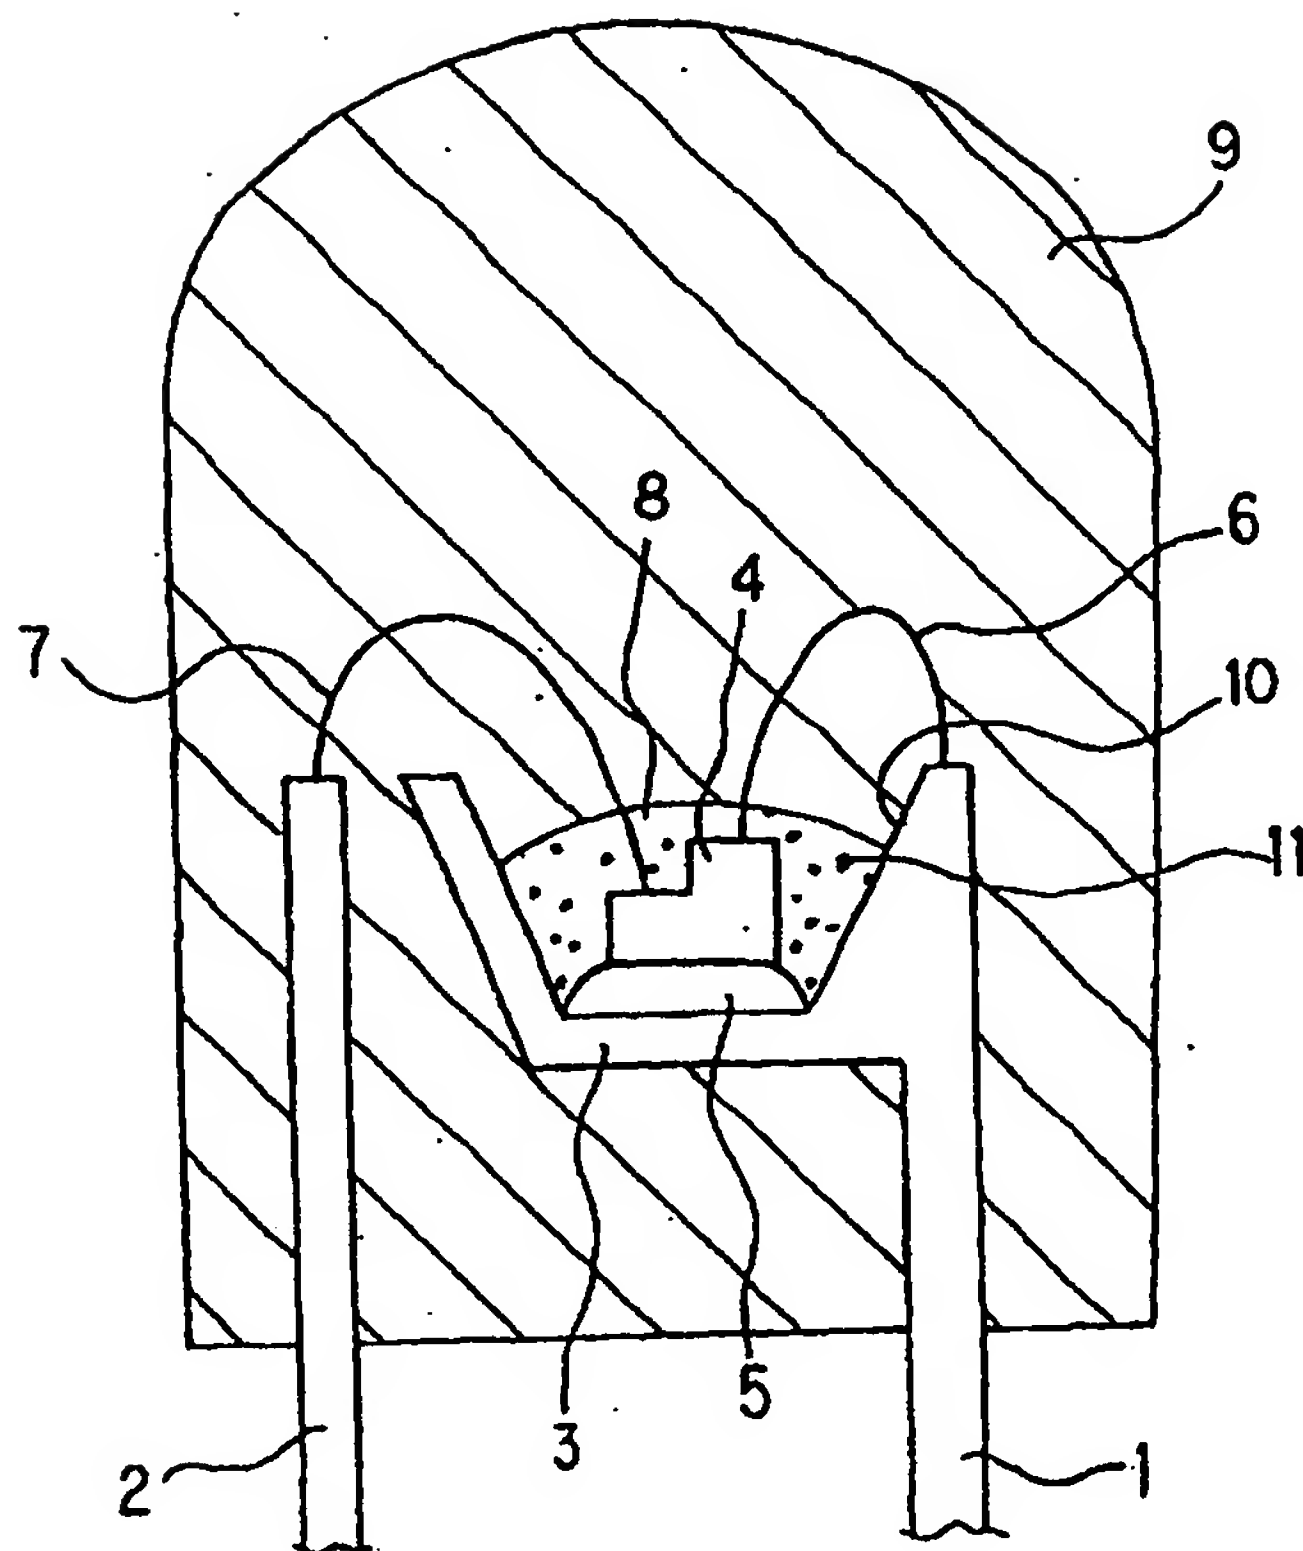


Fig. 2

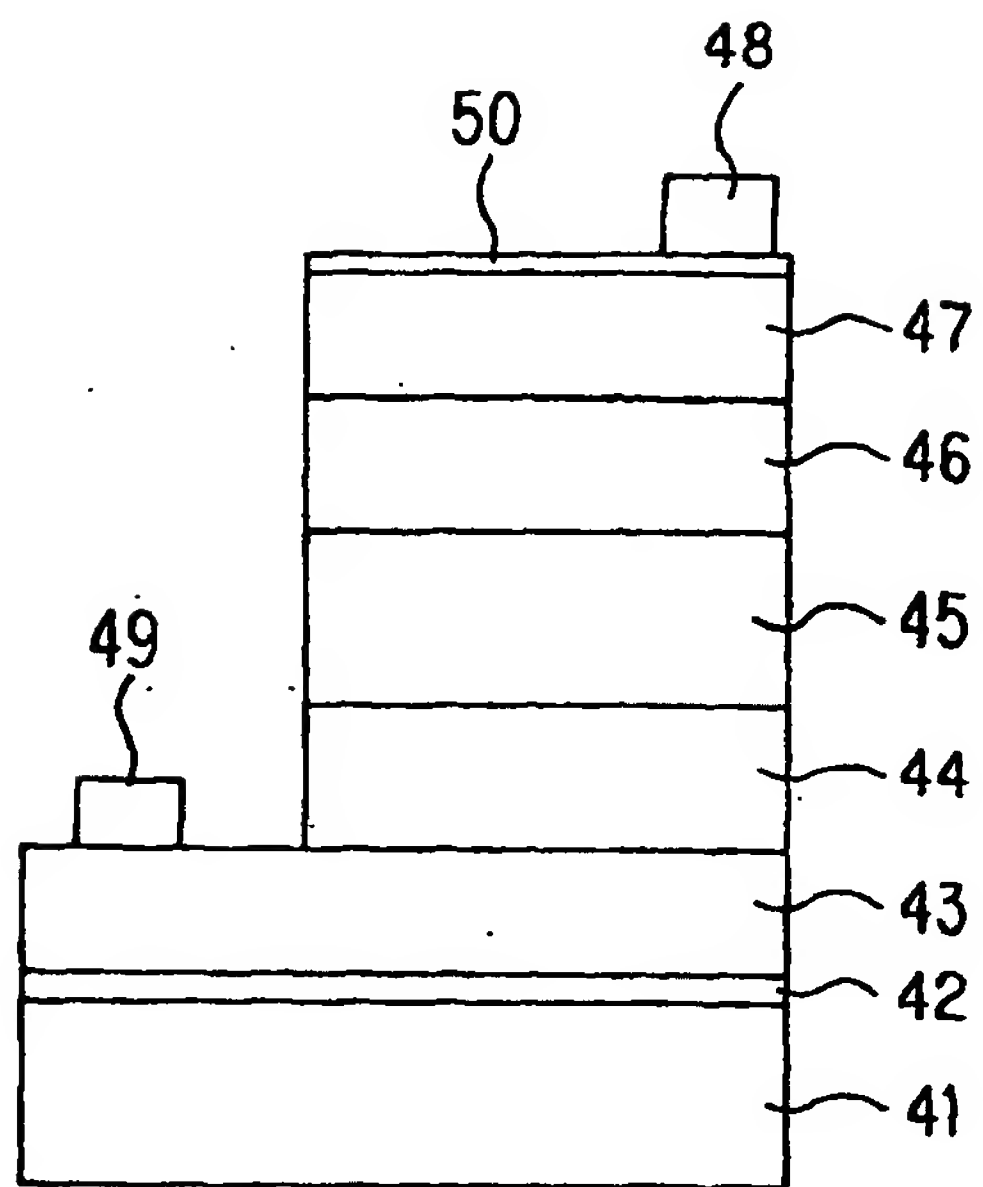


Fig. 3

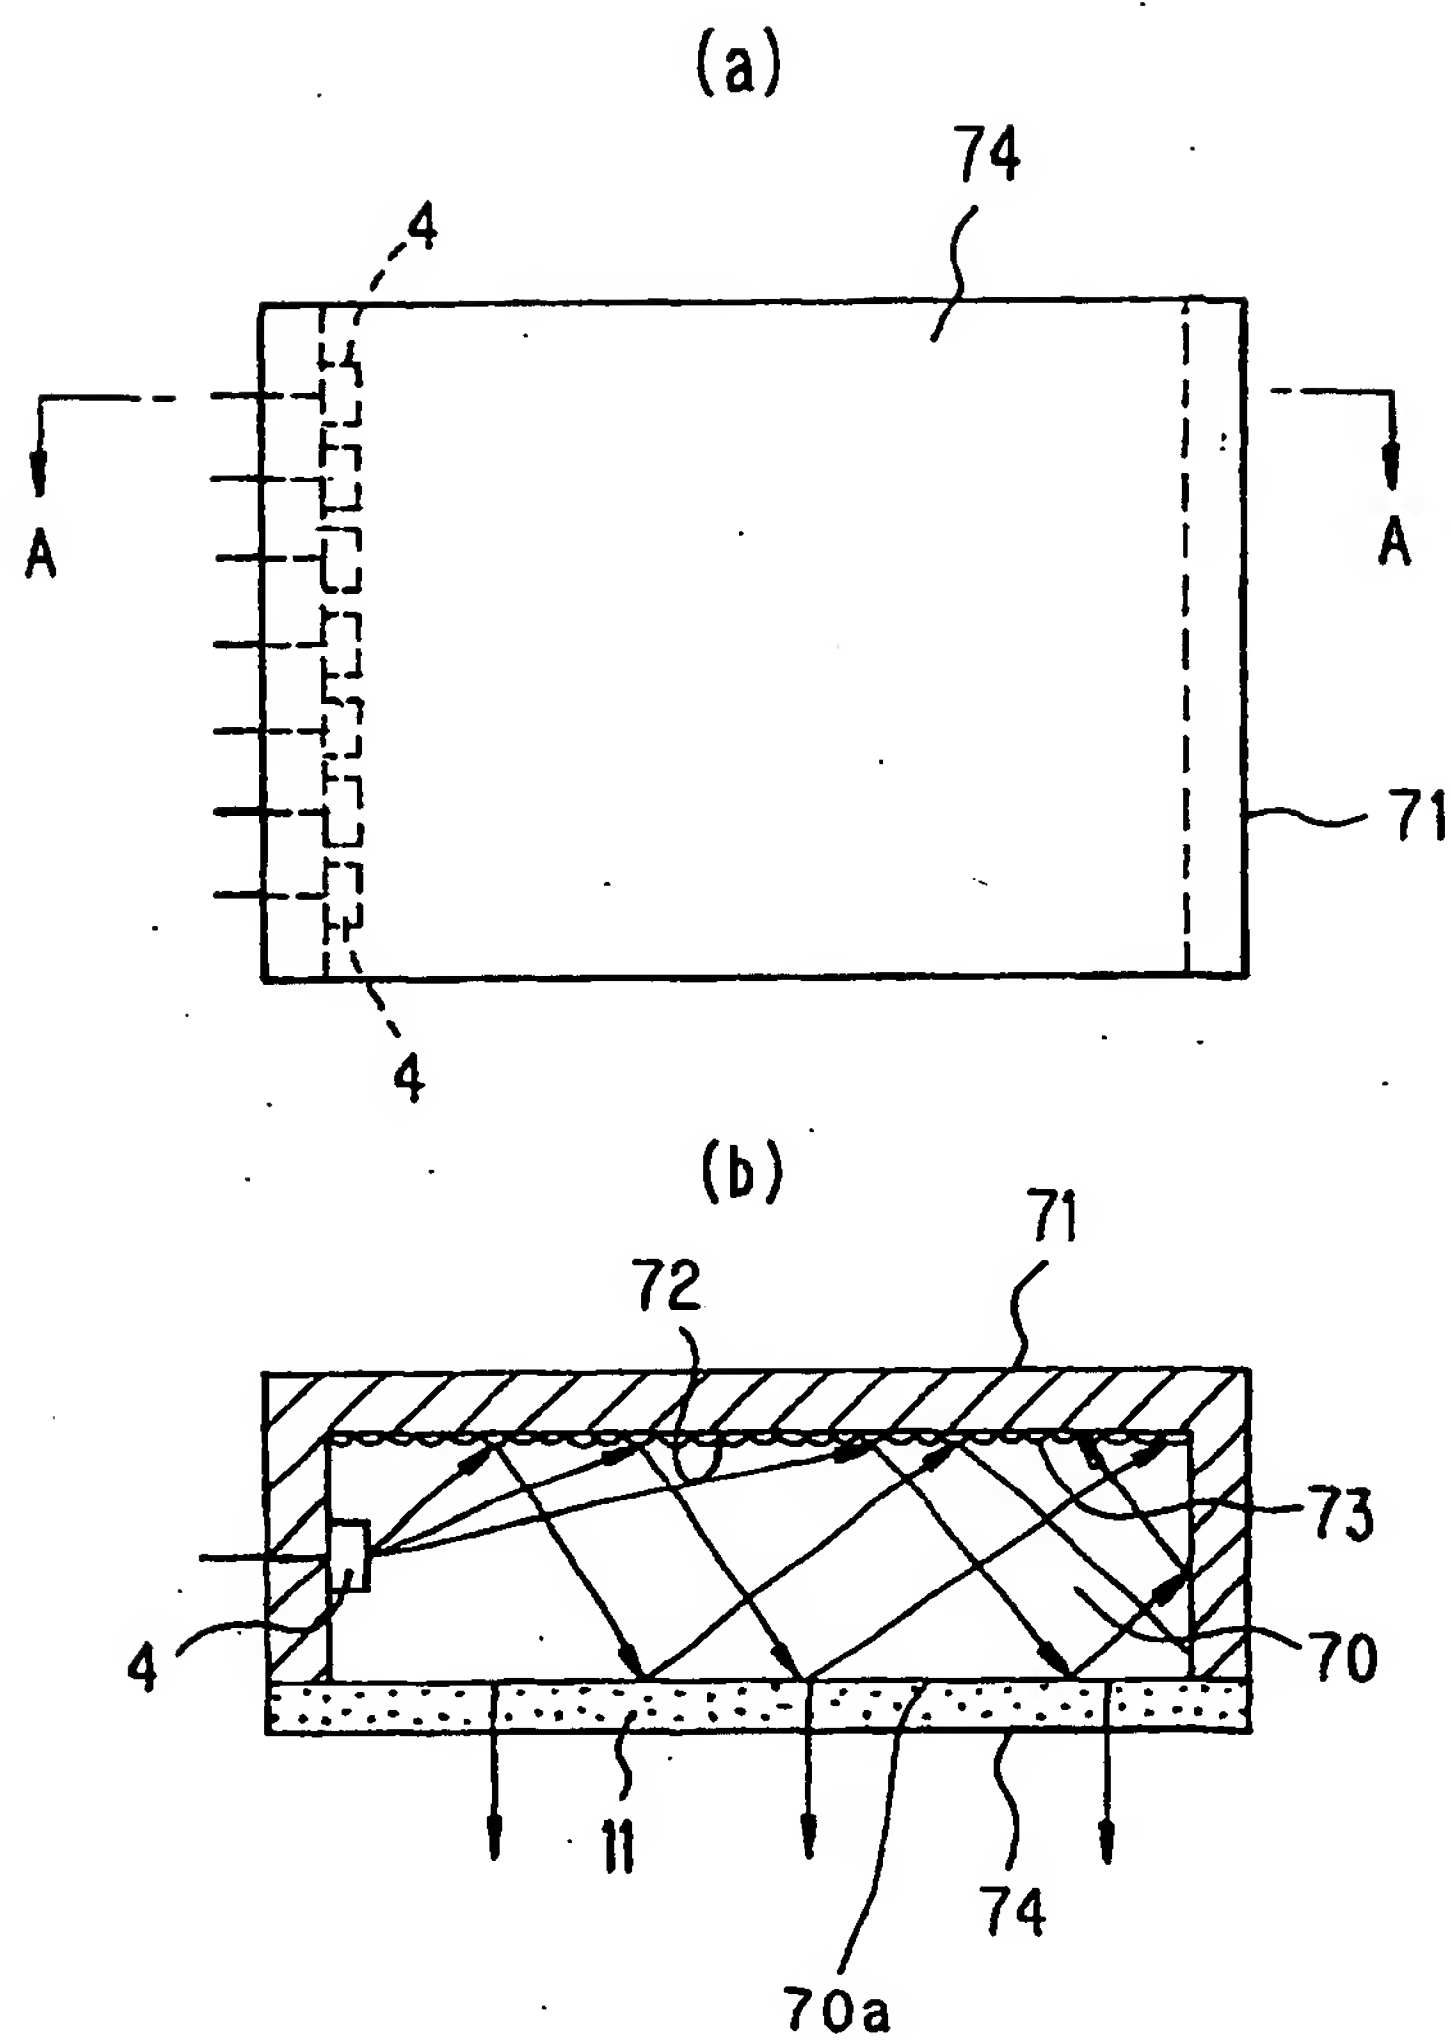


Fig. 4

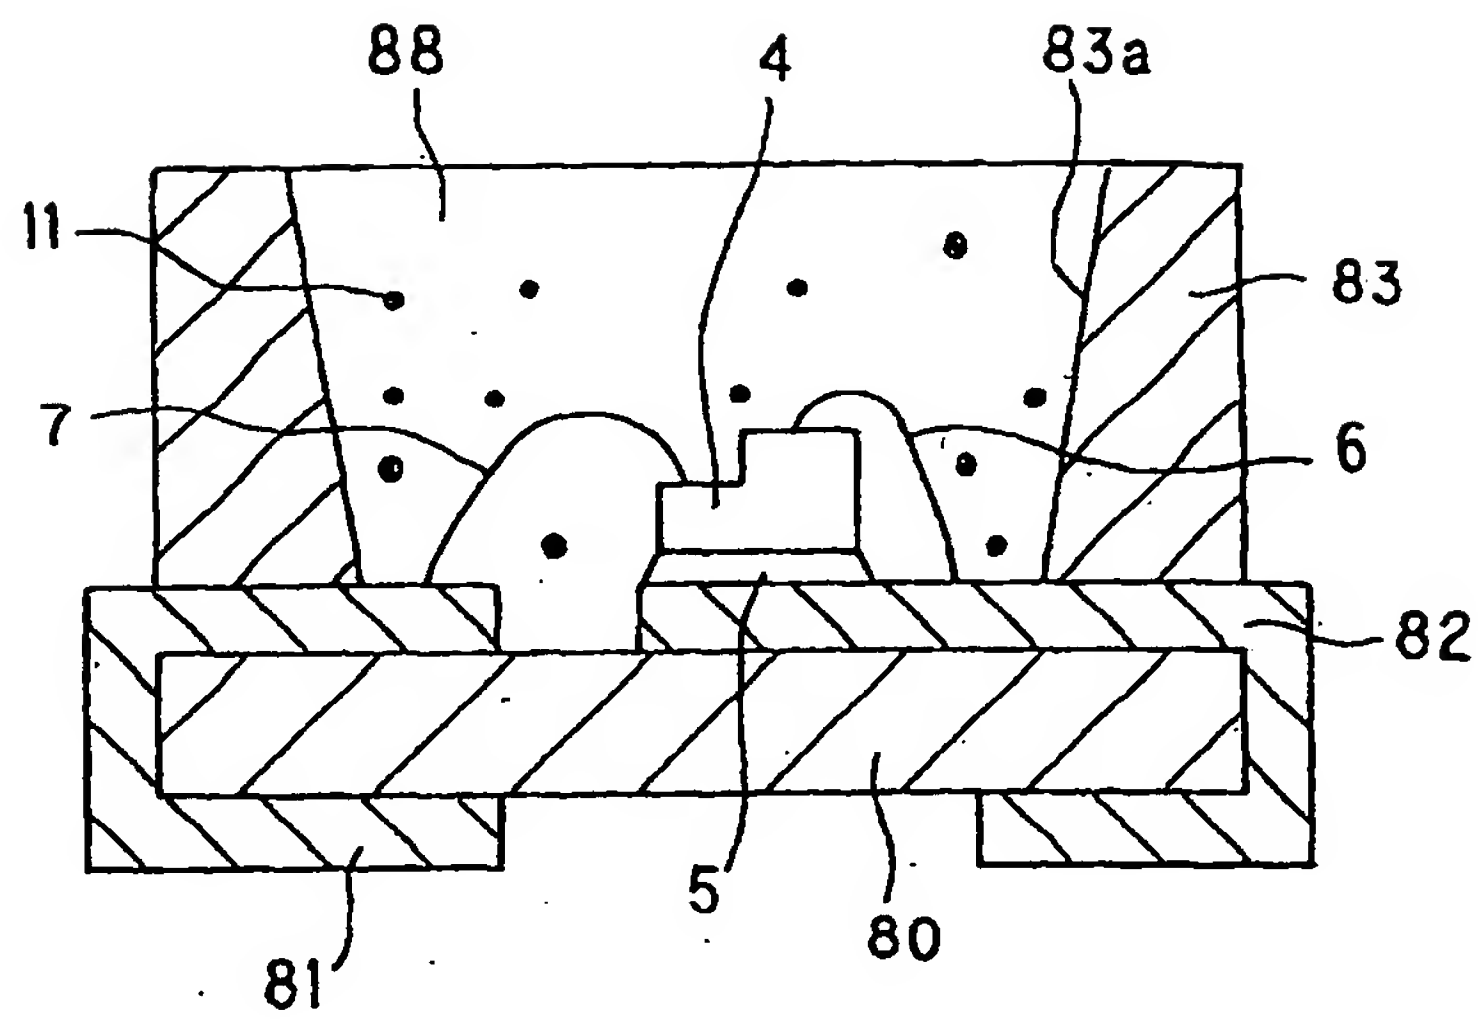


Fig. 5

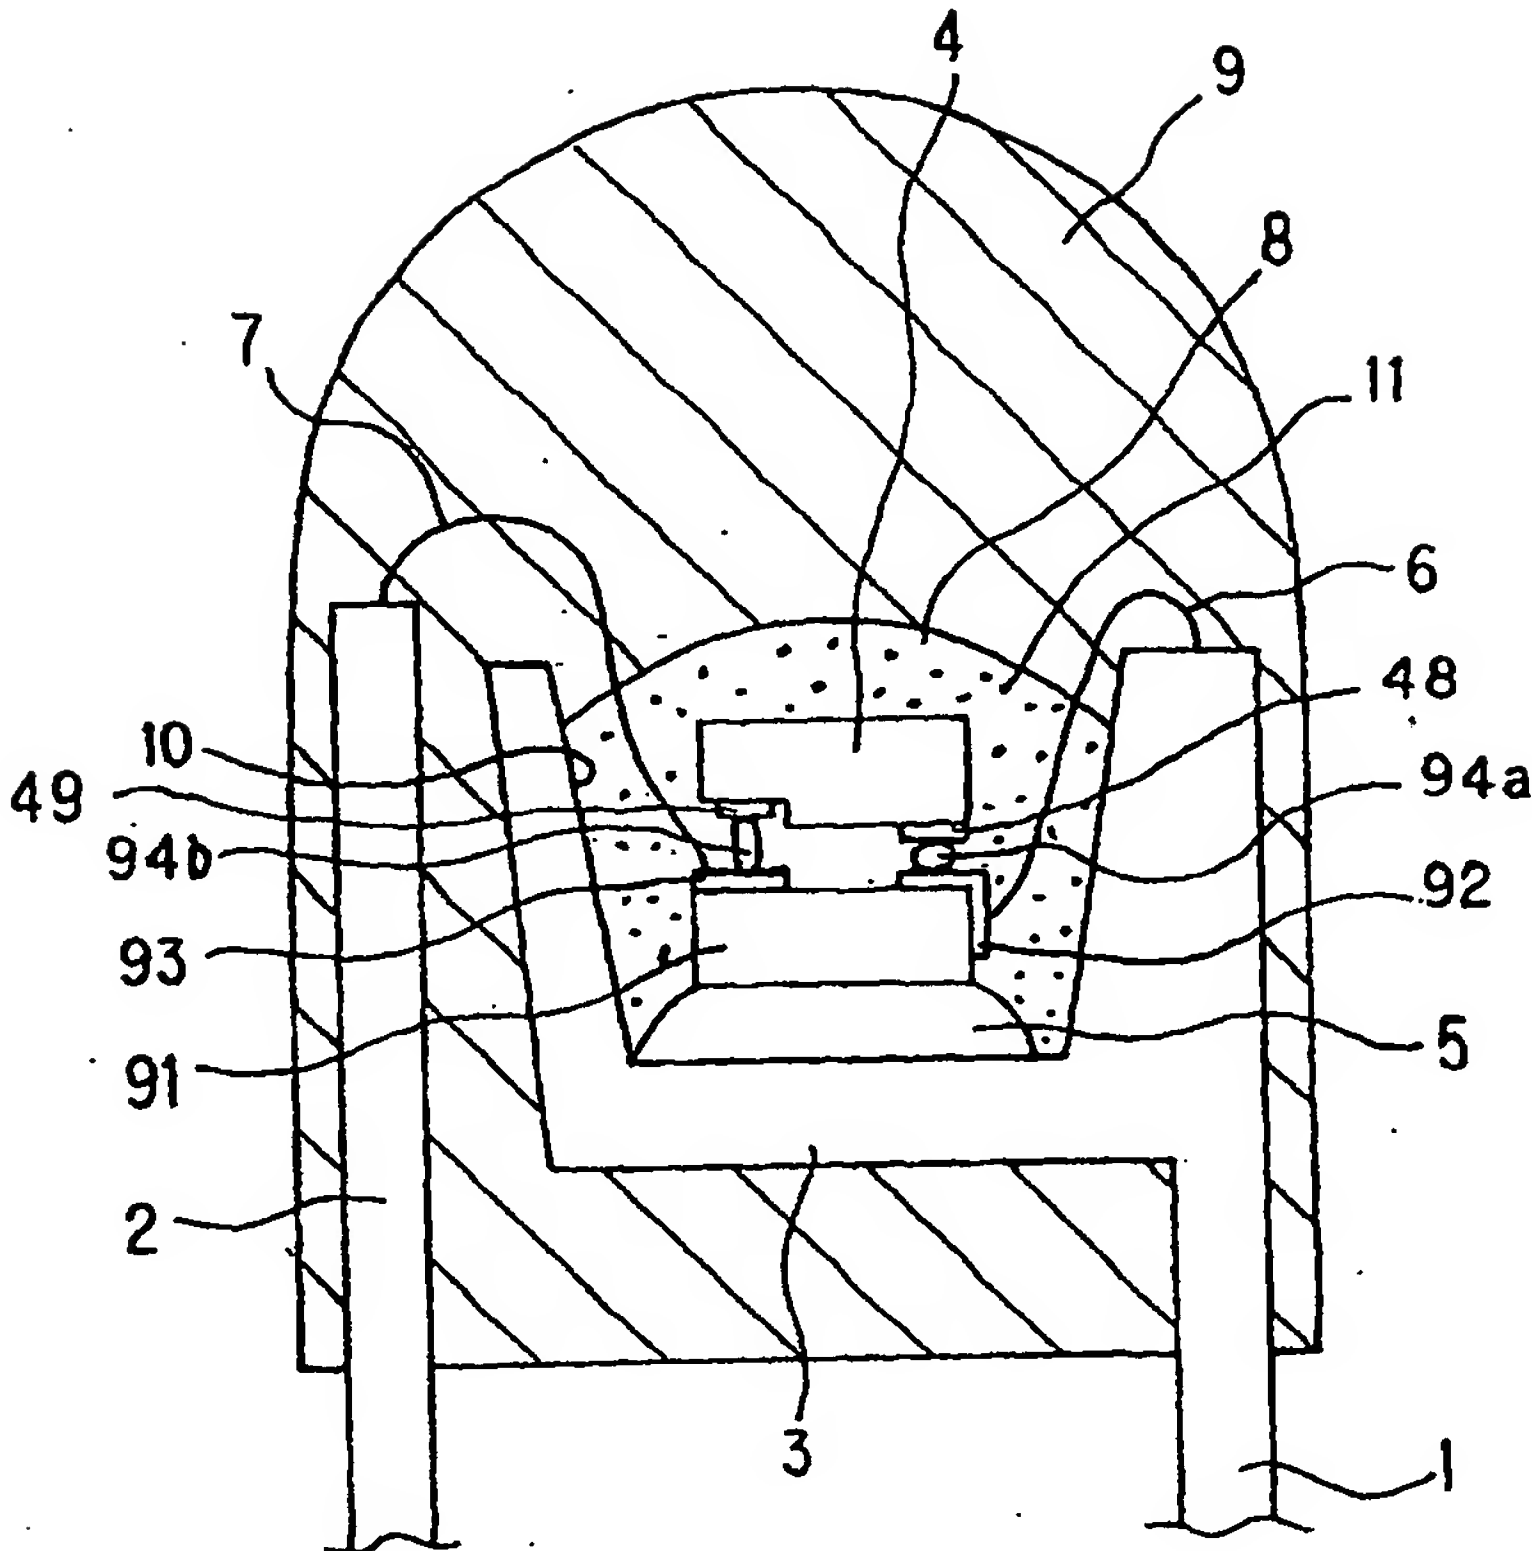


Fig. 6

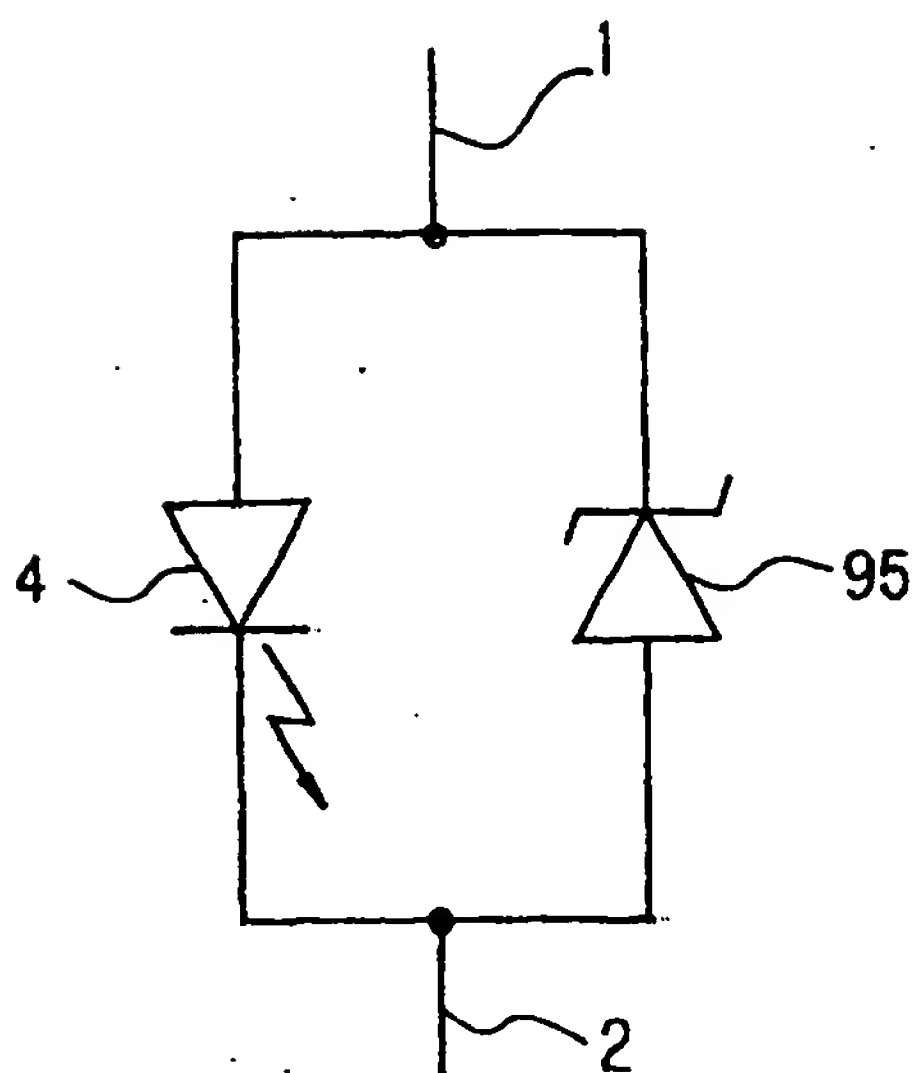


Fig. 7


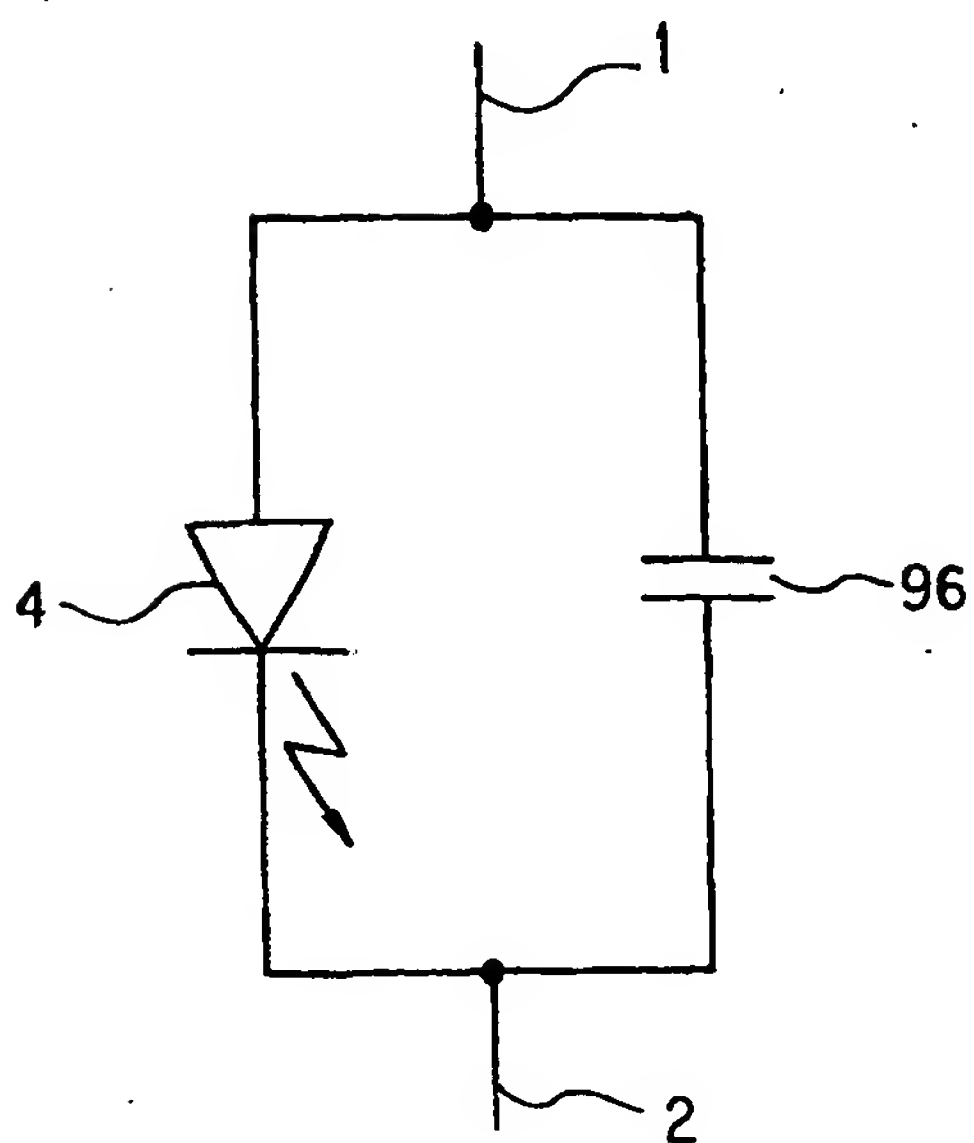


Fig. 8

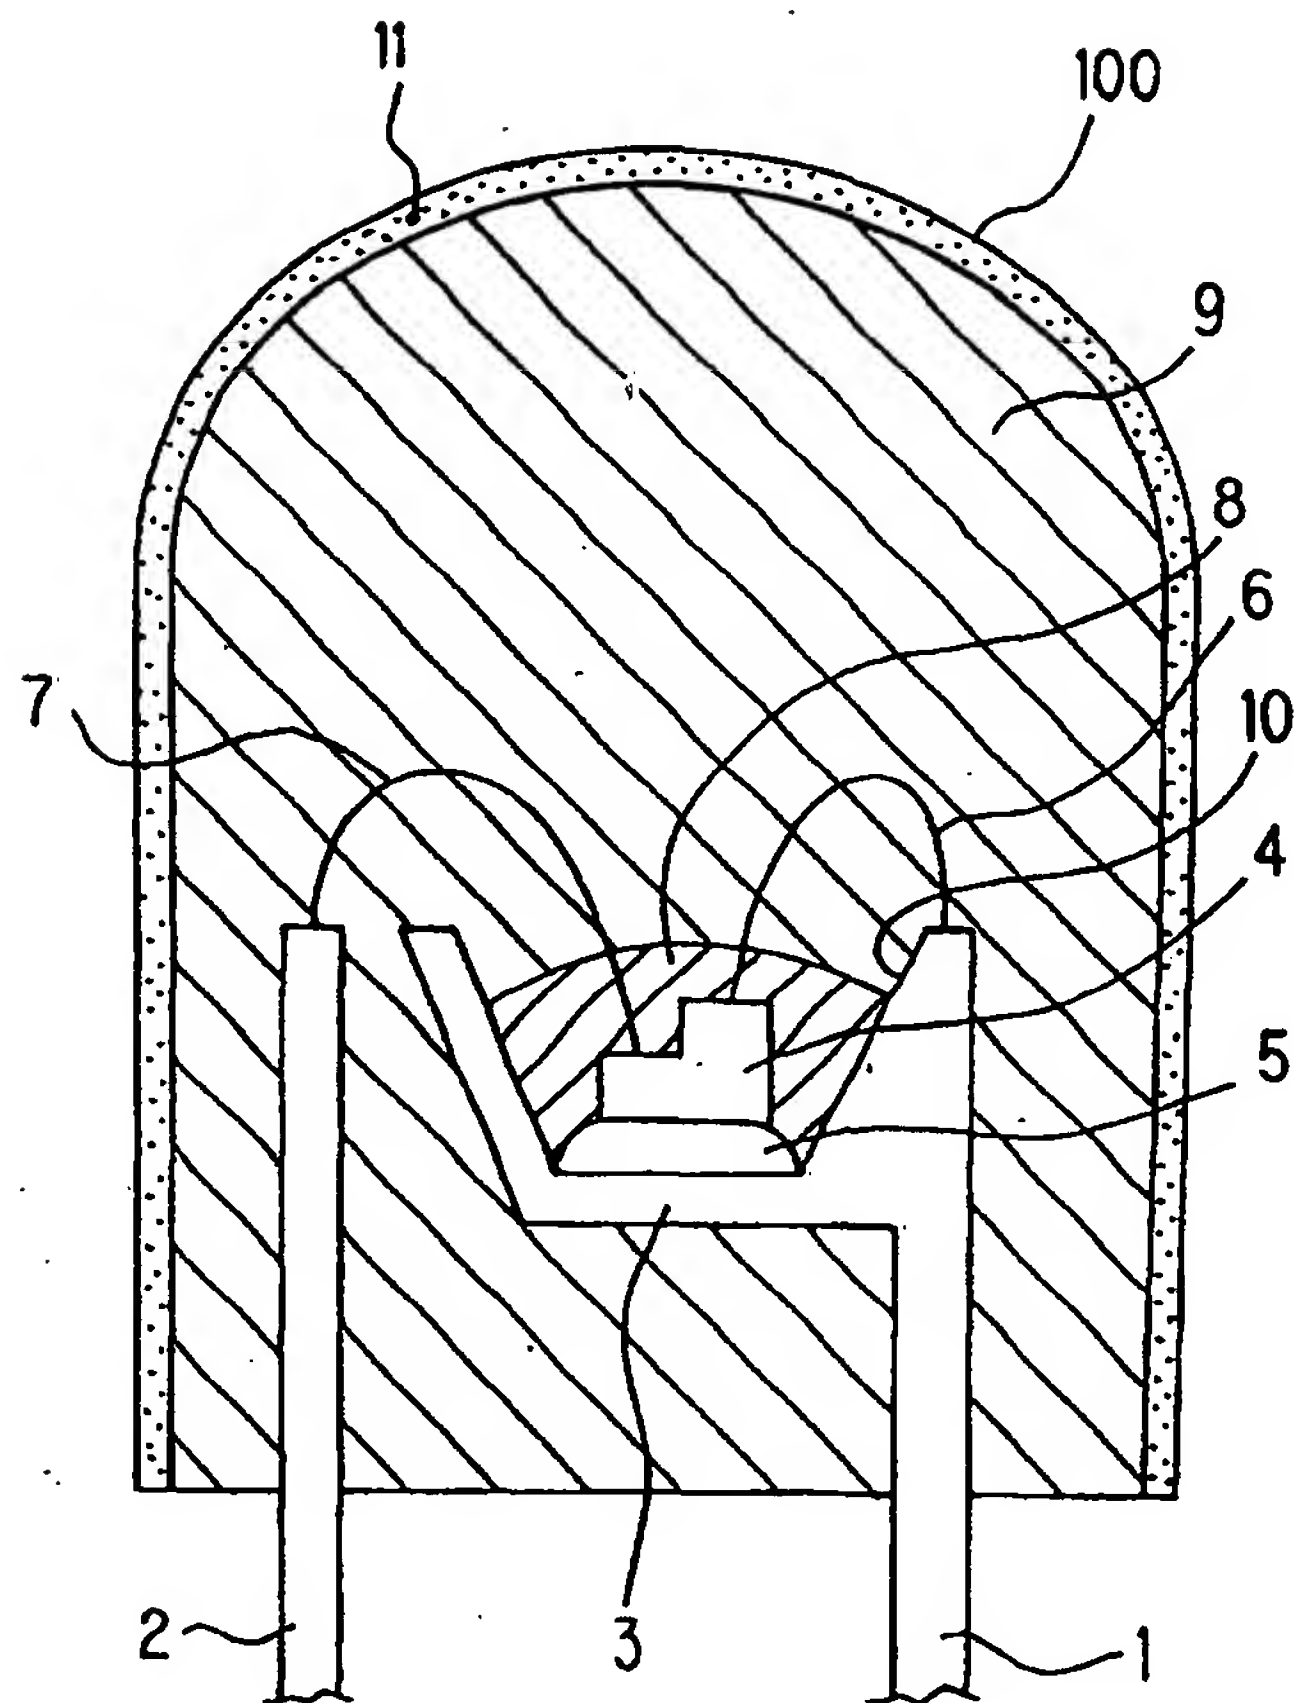

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/11628

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

The inventions according to claims 1 and 2 were already known to the public at the time when the present application was filed. Therefore, fifteen inventions of claims 1 and 2, claim 3, claims 4 to 9, claims 10 to 18, claim 19, claim 20, claims 20 to 23, claims 24 to 29, claim 30, claim 31, claim 32, claim 33, claim 34, claim 35 to 41 and claim 42 do not comply with the requirement of unity of invention.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/11628

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl.⁷ H01L33/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.⁷ H01L33/00, C09K11/59

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1922-1996	Toroku Jitsuyo Shinan Koho	1994-2002
Kokai Jitsuyo Shinan Koho	1971-2002	Jitsuyo Shinan Toroku Koho	1996-2002

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP, 2000-49389, A (Sanken Electric Co., Ltd.), 18 February, 2000 (18.02.00), Par. Nos. [0023] to [0028]; Figs. 1, 2 (Family: none)	1, 2, 4-42
X	JP, 2907286, B1 (Sanken Electric Co., Ltd.), 21 June, 1999 (21.06.99), Par. Nos. [0007] to [0009]; Fig. 1 (Family: none)	1, 2, 4-42
Y	JP, 2000-345152, A (Nichia Chemical Industries, Ltd.), 12 December, 2000 (12.12.00), Full text; all drawings (Family: none)	1, 2, 4-42
A	JP, 2000-349345, A (Matsushita Electronics Corp.), 15 December, 2000 (15.12.00), Full text; all drawings (Family: none)	1-42

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 14 March, 2002 (14.03.02)	Date of mailing of the international search report 02 April, 2002 (02.04.02)
Name and mailing address of the ISA/ Japanese Patent Office	Authorized officer
Facsimile No.	Telephone No.

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP01/11628

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 2000-269555, A (Citizen Electronic Co., Ltd.), 29 September, 2000 (29.09.00), Full text; all drawings (Family: none)	1-42
A	WO, 00/58665, A1 (Rohm Co., Ltd.), 05 October, 2000 (05.10.00), Full text; all drawings & EP 1167872 A1 & JP 2000-248280 A	1-42
A	WO, 00/05078, A1 (Nichia Chemical Industries, Ltd.), 05 February, 1998 (05.02.98), Full text; all drawings & AU 3635597 A & BR 9710792 A & CN 1268250 A & DE 602929 A & JP 2000-208815 A & TW 383508 A & US 5998925 A	1-42
A	JP, 2001-217461, A (Matsushita Electric Industrial Co., Ltd.), 10 August, 2001 (10.08.01), Full text; all drawings (Family: none)	1-42
A	JP, 2000-174346, A (Mitsubishi Cable Industries, Ltd.), 23 June, 2000 (23.06.00), Full text; all drawings (Family: none)	1-42
A	Shuji NAKAMURA et al., "Characteristics of InGaN multi-quantum-well-structure laser diodes", Applied Physics Letters, 1996, Vol.68, No.23, pages 3269 to 3271	1-42